Lightweight Compact 85


All artwork needs to be set up at the correct scaling to the final artwork.

E.g. A roller banner at 850mm x 2300mm needs to be set up at 85mm x 230mm (Tenth Scale)

212.5mm x 575mm (Quarter Scale)

425mm x 1150mm (Half Size)

850mm x 2300mm (Full Size)

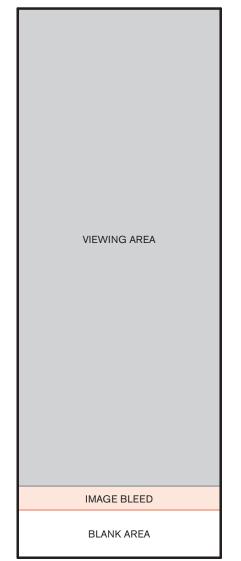

Roller banners have different areas when laying up your artwork. The viewing area is 2000mm high, it is recommended that no text is used below 1980mm as this avoids 'cutting off' of text. Please leave background image or colour to bleed to 2100mm. This is indicated on the diagram to the left. The final piece of the artwork will be 200mm of blank space at the bottom which will be attached to the leader and stay inside the roller banner cassette.

When looking at print resolution, if your file is at tenth scale and viewed at 1000% this will give you the exact view of how it will print. i.e. the actual correct size when magnified. Please note this only applies to image based files where images are 'live', such as Illustrator, Photoshop and high-res PDFs as the image is 'embedded' in the file. With layout files such as Quark and InDesign it is advisable to save as high-res PDFs, then view the PDF at the correct magnification. This rule also applies to all scaling with quarter scale being 400%, half size 200% and full size 100%.

With all artwork please ensure the following:

All elements are CMYK and not RGB. (Images, logos, etc.)

Black should be submitted as C 0%, M 0%, Y 0%, K 100%

All artwork has fonts/text included (embedded/uploaded) or are outlined in the files.

Images are 300dpi or an acceptable quality for the order.

If sending raw elements please include all files used in the creation of the artwork.

Please ensure PC files are supplied as print ready high-res PDFs with fonts/text outlined.



Lightweight Compact 100

All artwork needs to be set up at the correct scaling to the final artwork.

E.g. A roller banner at 1000mm x 2300mm needs to be set up at

100mm x 230mm (Tenth Scale) 250mm x 575mm (Quarter Scale) 500mm x 1150mm (Half Size) 1000mm x 2300mm (Full Size)

IMAGE BLEED
BLANK AREA

Roller banners have different areas when laying up your artwork. The viewing area is 2000mm high, it is recommended that no text is used below 1980mm as this avoids 'cutting off' of text. Please leave background image or colour to bleed to 2100mm. This is indicated on the diagram to the left. The final piece of the artwork will be 200mm of blank space at the bottom which will be attached to the leader and stay inside the roller banner cassette.

When looking at print resolution, if your file is at tenth scale and viewed at 1000% this will give you the exact view of how it will print. i.e. the actual correct size when magnified. Please note this only applies to image based files where images are 'live', such as Illustrator, Photoshop and high-res PDFs as the image is 'embedded' in the file. With layout files such as Quark and InDesign it is advisable to save as high-res PDFs, then view the PDF at the correct magnification. This rule also applies to all scaling with quarter scale being 400%, half size 200% and full size 100%.

With all artwork please ensure the following:

All elements are CMYK and not RGB. (Images, logos, etc.)

Black should be submitted as C 0%, M 0%, Y 0%, K 100%

All artwork has fonts/text included (embedded/uploaded) or are outlined in the files.

Images are 300dpi or an acceptable quality for the order.

If sending raw elements please include all files used in the creation of the artwork.

Please ensure PC files are supplied as print ready high-res PDFs with fonts/text outlined.



Lightweight Compact 120

All artwork needs to be set up at the correct scaling to the final artwork.

E.g. A roller banner at 1200mm x 2300mm needs to be set up at

120mm x 230mm (Tenth Scale) 300mm x 575mm (Quarter Scale) 600mm x 1150mm (Half Size) 1200mm x 2300mm (Full Size)

VIEWING AREA

IMAGE BLEED

BLANK AREA

Roller banners have different areas when laying up your artwork. The viewing area is 2000mm high, it is recommended that no text is used below 1980mm as this avoids 'cutting off' of text. Please leave background image or colour to bleed to 2100mm. This is indicated on the diagram to the left. The final piece of the artwork will be 200mm of blank space at the bottom which will be attached to the leader and stay inside the roller banner cassette.

When looking at print resolution, if your file is at tenth scale and viewed at 1000% this will give you the exact view of how it will print. i.e. the actual correct size when magnified. Please note this only applies to image based files where images are 'live', such as Illustrator, Photoshop and high-res PDFs as the image is 'embedded' in the file. With layout files such as Quark and InDesign it is advisable to save as high-res PDFs, then view the PDF at the correct magnification. This rule also applies to all scaling with quarter scale being 400%, half size 200% and full size 100%.

With all artwork please ensure the following:

All elements are CMYK and not RGB. (Images, logos, etc.)

Black should be submitted as C 0%, M 0%, Y 0%, K 100%

All artwork has fonts/text included (embedded/uploaded) or are outlined in the files.

Images are 300dpi or an acceptable quality for the order.

If sending raw elements please include all files used in the creation of the artwork.

Please ensure PC files are supplied as print ready high-res PDFs with fonts/text outlined.



Premium 60

All artwork needs to be set up at the correct scaling to the final artwork.

E.g. A roller banner at 600mm x 1950mm needs to be set up at 60mm x 195mm (Tenth Scale)

150mm x 487.5mm (Quarter Scale)

300mm x 975mm (1/2 Size)

600mm x 1950mm (Full Size)

VIEWING AREA

IMAGE BLEED BLANK AREA Roller banners have different areas when laying up your artwork. The viewing area is 1650mm high, it is recommended that no text is used below 1630mm as this avoids 'cutting off' of text. Please leave background image or colour to bleed to 1700mm. This is indicated on the diagram to the left. The final piece of the artwork will be 100mm of blank space at the bottom which will be attached to the leader and stay inside the roller banner cassette.

When looking at print resolution, if your file is at tenth scale and viewed at 1000% this will give you the exact view of how it will print. i.e. the actual correct size when magnified. Please note this only applies to image based files where images are 'live', such as Illustrator, Photoshop and high-res PDFs as the image is 'embedded' in the file. With layout files such as Quark and InDesign it is advisable to save as high-res PDFs, then view the PDF at the correct magnification. This rule also applies to all scaling with quarter scale being 400%, half size 200% and full size 100%.

With all artwork please ensure the following:

All elements are CMYK and not RGB. (Images, logos, etc.)

Black should be submitted as C 0%, M 0%, Y 0%, K 100%

All artwork has fonts/text included (embedded/uploaded) or are outlined in the files.

Images are 300dpi or an acceptable quality for the order.

If sending raw elements please include all files used in the creation of the artwork.

Please ensure PC files are supplied as print ready high-res PDFs with fonts/text outlined.



Premium 85

All artwork needs to be set up at the correct scaling to the final artwork.

E.g. A roller banner at 850mm x 2300mm needs to be set up at 85mm x 230mm (Tenth Scale)

212.5mm x 575mm (Quarter Scale)

425mm x 1150mm (Half Size)

850mm x 2300mm (Full Size)

VIEWING AREA

IMAGE BLEED

BLANK AREA

Roller banners have different areas when laying up your artwork. The viewing area is 2150mm high, it is recommended that no text is used below 2130mm as this avoids 'cutting off' of text. Please leave background image or colour to bleed to 2200mm. This is indicated on the diagram to the left. The final piece of the artwork will be 100mm of blank space at the bottom which will be attached to the leader and stay inside the roller banner cassette.

When looking at print resolution, if your file is at tenth scale and viewed at 1000% this will give you the exact view of how it will print. i.e. the actual correct size when magnified. Please note this only applies to image based files where images are 'live', such as Illustrator, Photoshop and high-res PDFs as the image is 'embedded' in the file. With layout files such as Quark and InDesign it is advisable to save as high-res PDFs, then view the PDF at the correct magnification. This rule also applies to all scaling with Quarter scale being 400%, Half Size 200% and Full Size 100%.

With all artwork please ensure the following:

All elements are CMYK and not RGB. (Images, logos, etc.)

Black should be submitted as C 0%, M 0%, Y 0%, K 100%

All artwork has fonts/text included (embedded/uploaded) or are outlined in the files.

Images are 300dpi or an acceptable quality for the order.

If sending raw elements please include all files used in the creation of the artwork.

Please ensure PC files are supplied as print ready high-res PDFs with fonts/text outlined.



Premium 100

All artwork needs to be set up at the correct scaling to the final artwork.

E.g. A roller banner at 1000mm x 2300mm needs to be set up at

100mm x 230mm (Tenth Scale) 250mm x 575mm (Quarter Scale) 500mm x 1150mm (Half Size) 1000mm x 2300mm (Full Size)

IMAGE BLEED
BLANK AREA

Roller banners have different areas when laying up your artwork. The viewing area is 2150mm high, it is recommended that no text is used below 2130mm as this avoids 'cutting off' of text. Please leave background image or colour to bleed to 2200mm. This is indicated on the diagram to the left. The final piece of the artwork will be 100mm of blank space at the bottom which will be attached to the leader and stay inside the roller banner cassette.

When looking at print resolution, if your file is at tenth scale and viewed at 1000% this will give you the exact view of how it will print. i.e. the actual correct size when magnified. Please note this only applies to image based files where images are 'live', such as Illustrator, Photoshop and high-res PDFs as the image is 'embedded' in the file. With layout files such as Quark and InDesign it is advisable to save as high-res PDFs, then view the PDF at the correct magnification. This rule also applies to all scaling with quarter scale being 400%, half size 200% and full size 100%.

With all artwork please ensure the following:

All elements are CMYK and not RGB. (Images, logos, etc.)

Black should be submitted as C 0%, M 0%, Y 0%, K 100%

All artwork has fonts/text included (embedded/uploaded) or are outlined in the files.

Images are 300dpi or an acceptable quality for the order.

If sending raw elements please include all files used in the creation of the artwork.

Please ensure PC files are supplied as print ready high-res PDFs with fonts/text outlined.



Premium 120

All artwork needs to be set up at the correct scaling to the final artwork.

E.g. A roller banner at 1200mm x 2300mm needs to be set up at

120mm x 230mm (Tenth Scale) 300mm x 575mm (Quarter Scale) 600mm x 1150mm (Half Size) 1200mm x 2300mm (Full Size)

IMAGE BLEED
BLANK AREA

Roller banners have different areas when laying up your artwork. The viewing area is 2150mm high, it is recommended that no text is used below 2130mm as this avoids 'cutting off' of text. Please leave background image or colour to bleed to 2200mm. This is indicated on the diagram to the left. The final piece of the artwork will be 100mm of blank space at the bottom which will be attached to the leader and stay inside the roller banner cassette.

When looking at print resolution, if your file is at tenth scale and viewed at 1000% this will give you the exact view of how it will print. i.e. the actual correct size when magnified. Please note this only applies to image based files where images are 'live', such as Illustrator, Photoshop and high-res PDFs as the image is 'embedded' in the file. With layout files such as Quark and InDesign it is advisable to save as high-res PDFs, then view the PDF at the correct magnification. This rule also applies to all scaling with quarter scale being 400%, half size 200% and full size 100%.

With all artwork please ensure the following:

All elements are CMYK and not RGB. (Images, logos, etc.)

Black should be submitted as C 0%, M 0%, Y 0%, K 100%

All artwork has fonts/text included (embedded/uploaded) or are outlined in the files.

Images are 300dpi or an acceptable quality for the order.

If sending raw elements please include all files used in the creation of the artwork.

Please ensure PC files are supplied as print ready high-res PDFs with fonts/text outlined.



Premium 150

All artwork needs to be set up at the correct scaling to the final artwork.

E.g. A roller banner at 1500mm x 2300mm needs to be set up at

150mm x 230mm (Tenth Scale) 375mm x 575mm (Quarter Scale) 750mm x 1150mm (Half Size) 1500mm x 2300mm (Full Size)

Roller banners have different areas when laying up your artwork. The viewing area is 2150mm high, it is recommended that no text is used below 2130mm as this avoids 'cutting off' of text. Please leave background image or colour to bleed to 2200mm. This is indicated on the diagram to the left. The final piece of the artwork will be 100mm of blank space at the bottom which will be attached to the leader and stay inside the roller banner cassette.

When looking at print resolution, if your file is at tenth scale and viewed at 1000% this will give you the exact view of how it will print, i.e. the actual correct

When looking at print resolution, if your file is at tenth scale and viewed at 1000% this will give you the exact view of how it will print. i.e. the actual correct size when magnified. Please note this only applies to image based files where images are 'live', such as Illustrator, Photoshop and high-res PDFs as the image is 'embedded' in the file. With layout files such as Quark and InDesign it is advisable to save as high-res PDFs, then view the PDF at the correct magnification. This rule also applies to all scaling with quarter scale being 400%, half size 200% and full size 100%.

With all artwork please ensure the following:

All elements are CMYK and not RGB. (Images, logos, etc.)

Black should be submitted as C 0%, M 0%, Y 0%, K 100%

All artwork has fonts/text included (embedded/uploaded) or are outlined in the files.

Images are 300dpi or an acceptable quality for the order.

If sending raw elements please include all files used in the creation of the artwork.

Please ensure PC files are supplied as print ready high-res PDFs with fonts/text outlined.

VIEWING AREA

IMAGE BLEED

BLANK AREA

